



MODULAR DESIGN

Direct Mounting
to Bray Valves

S98 Pneumatic Actuator

Bray's engineering excellence and precision manufacturing have produced a modular product line optimized for mounting on Bray valves. In addition all Bray accessories are fully configurable and directly mount to the actuator – providing flexibility and efficiency at reduced cost.

The Series 98 actuators were designed primarily for pneumatic operation to a maximum pressure of 150 psi (10.3 Bar) and for temperature ranges of -50°F (-46°C) to 300°F (+149°C).

- » Compact design offers a high torque to weight ratio
- » Modular Design offers easy configuration in the field
- » Module alignment ensured by precision machined centering rings
- » Torque Output ranging from 2,744 to 885,100 Lb-in (310 to 100,000 Nm)
- » Spring End Torque ranging from 2,744 to 445,261 Lb-in (310 to 50,306 Nm)
- » Premium epoxy/polyurethane coating as standard

Operating Conditions


Pressure Range	40 - 150 psi (2.8 - 10.3 bar)
Media	Dry Compressed Air/Inert Gas*
Temperature Range Options	Standard: -20°F to 200°F (-29°C to 93°C)
	High Temperature: Up to 300°F (149°C)*
	Low Temperature: Down to -50°F (-46°C)*

Compliances

Torque Base	Mounting Dimensions as per ISO 5211: 2001(E)
Accessories	Shaft Driven Accessories Mounting per NAMUR-VDE
Performance Testing	EN 15714-3:2009
Ingress Protection	IP66/IP67M per IEC 60529
Safety	ATEX, SIL 3 suitable, PED on request

*Contact Factory for other media or non-standard temperature range.


S98 Actuator Torque Ranges

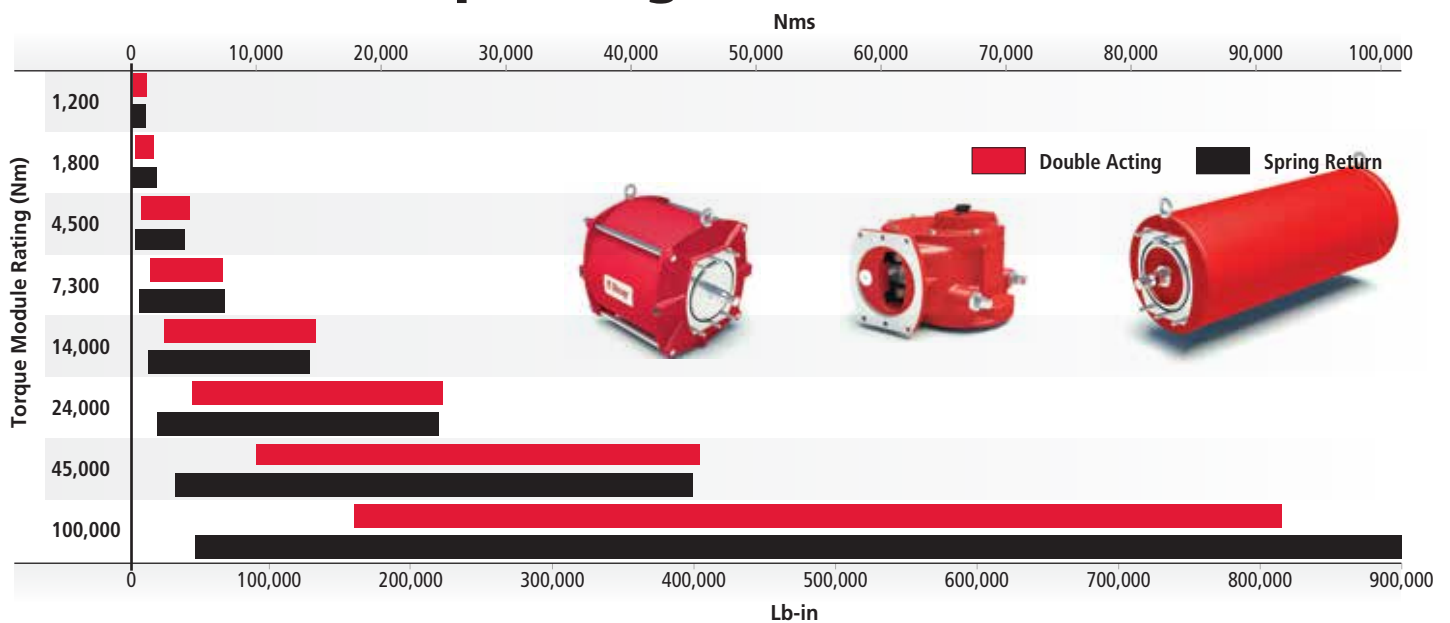

S98 Torque Modules




- » Integral single piece cast housing for rigidity
- » Two ISO drilling patterns in base to maximize direct mounting
- » Symmetrical and Canted Yoke options



- » Integral travel stops
- » Replaceable self lubricating metal backed PTFE bearings for enhanced service life
- » NAMUR mounting for shaft driven accessories, standardized across models

- » Guided drive supports side loads
- » Relief vent prevents ingress and over pressurization

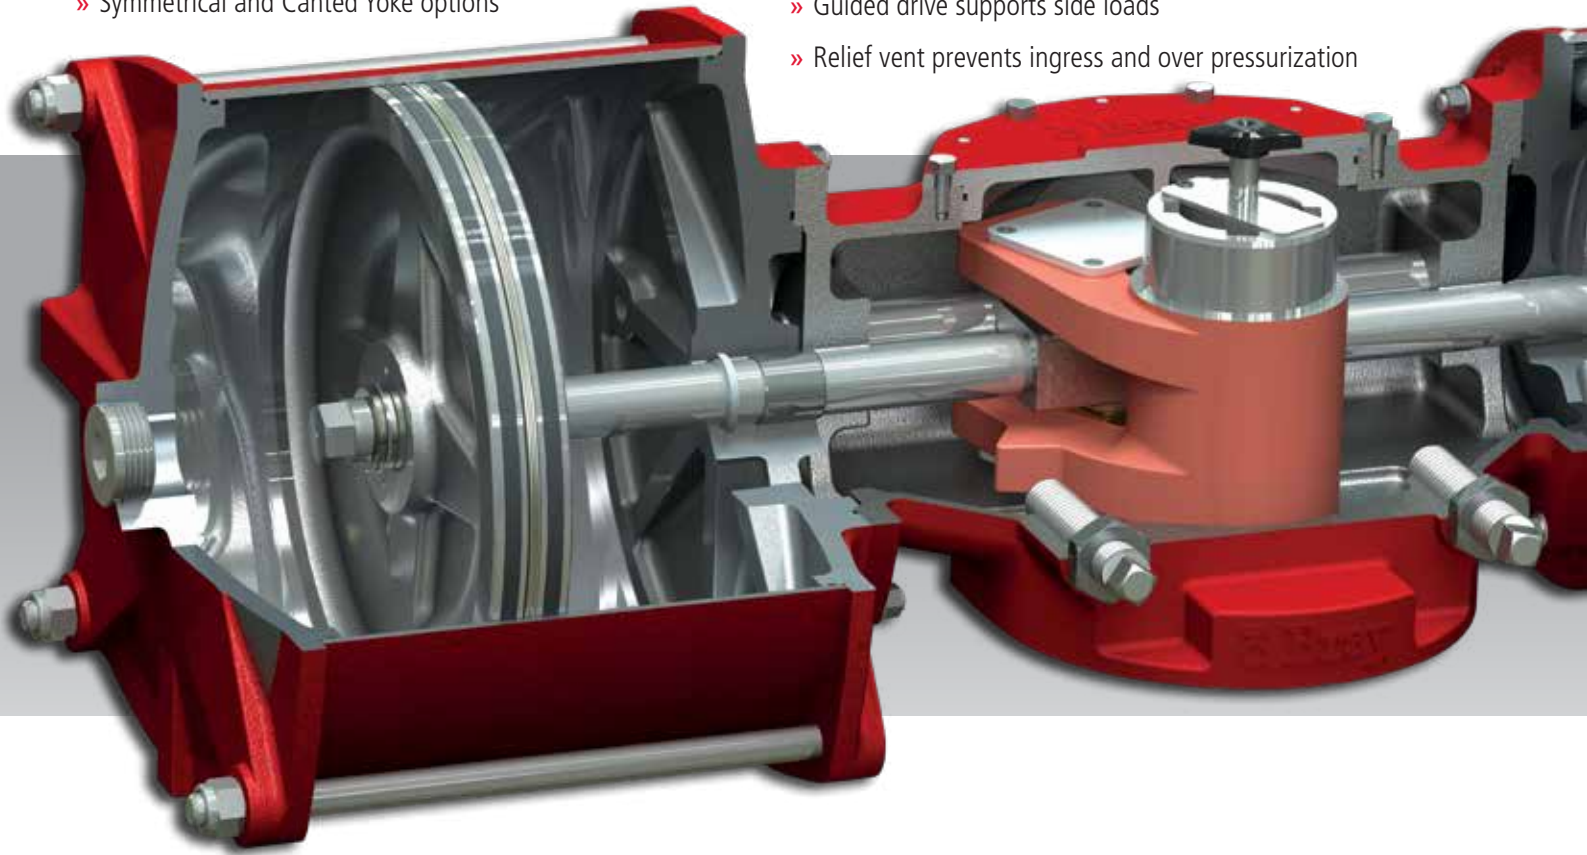


S98 Pressure Modules



- » Corrosion protected external tie rods designed for long seal life and reliability
- » Honed and hard chrome plated cylinder barrel for wear and corrosion protection and enhanced seal performance
- » Multiple ports available
- » Quad ring and U-cup seals for dynamic sealing
- » Dual wear bands for better guidance of piston

Pressure Modules




Pneumatic



Hydraulic


Torque Module




S98 Direct Acting Modules




Direct Acting Modules




Extended Stop




Pneumatic



Jack Screw



Hydraulic Override






Jack Screw with Gear Drive

**MODULAR
DESIGN**

Direct Mounting to Bray Valves



S98 actuator suitable for a specific application can be configured by combining modules.



S98 Spring Modules

- » Fully enclosed and welded design for safety
- » Guided and centered springs for smooth operation
- » No metal to metal contact of spring or guide
- » Thrust base for mounting jackscrew and hydraulic override
- » Tectyl coated springs for corrosion protection

Spring Return Modules




Standard




Jackscrew Direct Drive Override



Extended Travel Stop

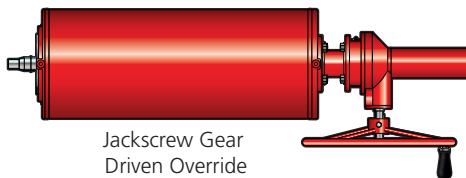

Jackscrew Gear Driven Override



Hydraulic Override

Symmetrical & Canted Yokes



The heart of the Series 98 actuator is the scotch yoke. This mechanism converts linear motion into rotational motion. The piston and/or springs directly couple to a rotating yoke with a slot that engages the sliding blocks. This type of actuator has a distinct torque curve which starts high then dips toward the middle of the stroke and ends with increasing torque, thus offering an inherent optimization of torque requirements associated with many valve applications.



Symmetrical

The symmetrical yoke provides a balanced torque output curve. This is the best choice in applications where the torque requirements at the seat break out and end positions are similar. As the name suggests, the output torque curve is symmetrical about the mid rotation point.





Canted

The torque demands of some valve types are not the same at the break and end points. These applications call for optimizing the torque output vs. shaft angle curve. The canted yoke option shifts the torque output curve. The torque output is matched to the application requirements.



S98 Torque Curve Comparison

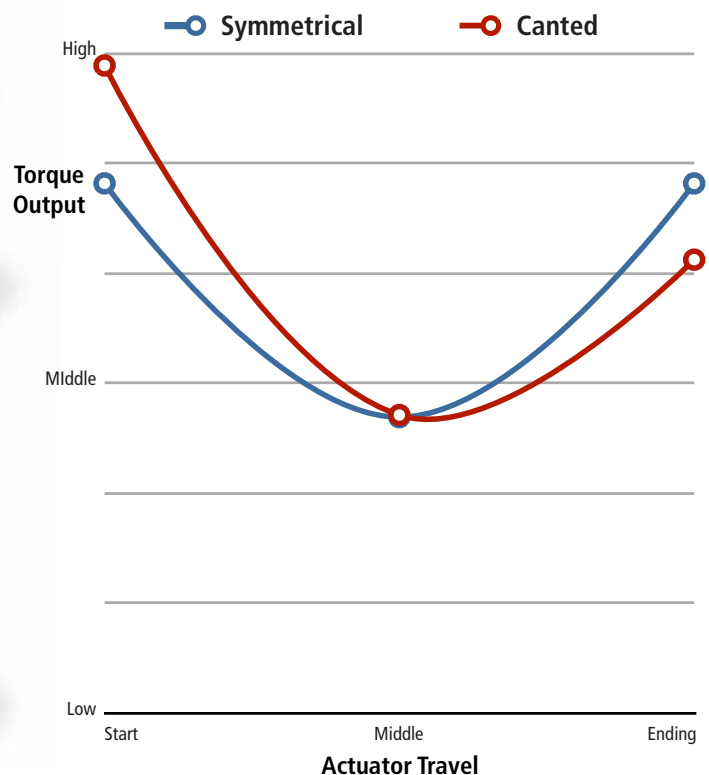

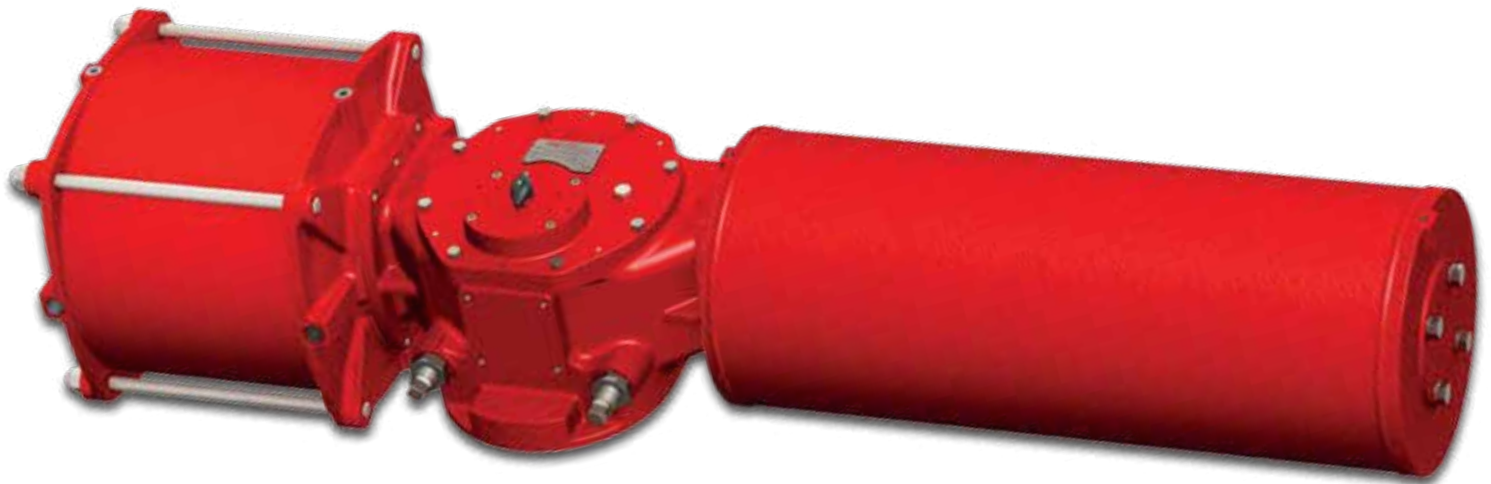

S98 Accessories

Add to the versatility of the S98 by choosing the applicable accessories from Bray's complete line of positioners, status monitors and solenoids. The combination of actuators and accessories offer the best compatibility, economy and quality performance in the flow control industry.

S6A Electro-Pneumatic Positioners

- » Precise, microprocessor driven advanced communication (HART, Profibus, Foundation Field Bus)
- » For use with both double or single acting actuators
- » Partial stroke test capable



Series 6A



Series 6A - Explosion Proof

S50 Valve Status Monitors

- » 10 amps at 125 or 250 volts AC
- » Internal travel switches that are prewired to a terminal block
- » Weatherproof or Explosion proof available



Series 50



Series 50
High Visibility Display

S52 Valve Status Monitors

- » ProxSensor provides two proximity sensors in one fully sealed, compact enclosure.
- » AC, DC, Intrinsically safe and BUS Network versions are offered.



Series 52



Filter Regulator

Solenoid Valves

- » 3-Way or 4-Way
- » Weatherproof or Explosion proof available

Filter Regulator

- » 5 micron filter designed to provide removal of solids and liquids from compressed air.

Distributed by | Distribuido por :



ANYTHING
≈ FLOWS ≈

INFO@ANYTHINGFLOWS.COM

WWW.ANYTHINGFLOWS.COM

Flow Control , our passion ®

Life Flows on ™



SCAN ME